

EPSON OPOS ADK for .NET Manual

Application Development Guide

POSPrinter

(TM-J7000/J7100/J7500/J7600)

Version 1.11 Nov. 2007

Notes

- (1) Reproduction of any part of this documentation by any means is prohibited.
- (2) The contents of this documentation are subject to change without notice.
- (3) Comments and notification of any mistakes in this documentation are gratefully accepted.
- (4) This software cannot be used with other equipment that the specified.
- (5) EPSON will not be responsible for any consequences resulting from the use of any information in this documentation.

Trademarks

Microsoft®, Windows®, Windows Server® and Windows Vista® are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. IBM® and PC/AT® are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both. Epson® and ESC/POS® are registered trademarks of Seiko Epson Corporation. Other product and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective companies. Epson disclaims any and all rights in those marks.

Contents

Chapter 1 Introduction	1
1.1 Terminology	1
Chapter 2 Before Using POSPrinter	3
2.1 Device Setup	3
2.2 Precautions and Restrictions	3
Chapter 3 Properties, Methods, and Events	5
3.1 Properties	5
3.2 Methods	11
3.3 Events	34
Appendix-A Revision history	36
A.1 EPSON OPOS ADK for .NET 1.11	36
A.2 EPSON OPOS ADK for .NET 1.9	36
A.3 EPSON OPOS ADK for .NET 1.8	36
Appendix-B SetupPOS Settings	38
B.1 Verbose Error Codes Check Box	38
B.2 CharacterSet Matches Device Check Box	39
B.3 Ink on Paper for Completion Check Box	39
B.4 Save Images in NVRAM Check Box	40
B.5 Increase Receipt CPI Check Box	40
B.6 Increase Slip CPI Check Box	41
B.7 Extend Rotate Print Area Check Box (TM-J7100/TM-J7600)	41
B.8 Slip Reverse Eject Check Box	42
B.9 Halftone Method Combo Box	42
B.10 Device Font Type Combo Box	43
B.11 Secondary Color Combo Box (TM-J7100/TM-J7600)	43
B.12 Receipt Width Combo Box	44
Appendix-C Hardware Settings	45
Appendix-D Default Values of Properties	48
Appendix-E Escape Sequences	59
Appendix-F DeviceStatistics	63

Chapter 1 Introduction

This manual includes explanations on how to use a POSPrinter with EPSON JavaPOS ADK, as well as related items and device-specific precautions.

For details on the POS for .NET API, refer to the "UnifiedPOS Retail Peripheral Architecture Version 1.11" specification and the MSDN "POS for .NET v1.11 SDK Documentation": Refer to the release notes for information on where to find the latest information.

1.1 Terminology

- "UnifiedPOS Retail Peripheral Architecture Version 1.11" may be abbreviated as "UPOS".
- "Microsoft POS for .NET" may be abbreviated as "POS.NET".
- "EPSON JavaPOS ADK Version 1.11" may be abbreviated as "OPOS.NET".
- "POSPrinter" and "printer" may be referred to as "device".
- "ServiceObject of POSPrinter provided by OPOS.NET" may be abbreviated as "ServiceObject".
- "ErrorCode properties of PosControlException" may be abbreviated as "ErrorCode".
- "ErrorCodeExtended properties of PosControlException" may be abbreviated as "ErrorCodeExtended".
- "**JrnLineChars**", "**RecLineChars**", "**SlpLineChars**" and other properties defined commonly for stations may appear as "**Str**". For example, "**StrLineChars**" character strings for indicating stations.
- "Exception" indicates "PosControlException".
- The EPSON original device constant used with this device is defined in "jp.co.epson.uposcommon.EpsonUPOSConst" and "jp.co.epson.uposcommon.EpsonPOSPrinterConst".
- Inch: 1 inch is 25.4 mm.
- "dpi" is the number of dots per inch.
- The language specification of the device may be indicated as follows.
ANK specification: Device without multi-byte characters
- Wired LANs and wireless LANs may be referred to as networks.

- A “receipt”, “journal” or “slip” indicates either a station or paper depending on the context.
- NVRAM indicates non-volatile random access memory.

Chapter 2 Before Using POSPrinter

This chapter includes explanations on how to set up a POSPrinter, as well as precautions and restrictions on use.

2.1 Device Setup

After checking the model and settings of the hardware, use the SetupPOS utility to select the correct device. For details on how to configure hardware, refer to “Hardware Settings” for each device in [“Appendix-C Hardware Settings”](#). For details on how to use the SetupPOS utility, refer to the User’s Reference Guide and [“Appendix-B SetupPOS Settings”](#).

2.2 Precautions and Restrictions

- Only DTR/DSR device flow control is supported.
- If you turn the device off and then on or open the cover during printing, unnecessary data may be printed.
- Wait at least five seconds after the device has been turned off before turning it back on.
- Using ESC|#E to send data may hinder the subsequent operations of the ServiceObject or cause an unexpected result because the sent data is not checked by ServiceObject.
- Sending a print control command is not recommended. Careful consideration is required before sending such a command.
- Any character code (Unicode) expressed in the string type is converted to a byte code based on the value set in the **CharacterSet** property. Be careful if you want to specify the extended ASCII code for byte code conversion.
- All properties and parameters of a method affected by the **MapMode** property are processed by “dot”. Therefore, when the **MapMode** property is other than MapMode.Dots, an error of ± 1 may be produced in the property and the parameter of the method affected by the **MapMode** property.

- Only a value described in the **StnLineCharsList** property can be set in the **StnLineChars** property. If a value other than a value described in the **StnLineCharsList** property is set, the value is set to the nearest value that is smaller in the **StnLineCharsList** property. However, an exception is thrown if a value larger than the largest value described in the **StnLineCharsList** property is set.
- If 254 or 255 is specified in the **CharacterSet** property and PTR_DI_NONE is the specification of the PTR_DI_BINARY_CONVERSION command of the **DirectIO** method, the Unicode encoding name becomes the system default encoding name.
- If the paper is ejected before the printing of a slip is complete, any data that was not printed is deleted. If this happens, the slip station selection is canceled.
- When NVRAM is used by the **SetBitmap** method, no consideration is given to other applications saving images to NVRAM.
- The device has a limit for the number of times the write to NVRAM operation can be performed. Try your utmost to avoid programming that involves using the **SetBitmap** method and **DirectIO** method for repeated saving and deleting because the write to NVRAM operation is performed when saving and deleting an image.
- The capacity of NVRAM for storing images differs depending on the settings of the device. Be extremely careful when replacing devices because the capacity of NVRAM for storing images is not considered at the ServiceObject.

Chapter 3 Properties, Methods, and Events

3.1 Properties

The properties listed below differ from functions described in UPOS.

3.1.1 CapPowerReporting Property

Description

Identifies the reporting capabilities of the device.

One of the following values is set.

Value	Meaning
PowerReporting.Standard	The value set when a serial connection is established. ServiceObject can determine and report two of the power states: OFF_OFFLINE (the device is off or offline) and ONLINE.
PowerReporting.Advanced	The value set when a parallel, USB and network connection is established. ServiceObject can determine and report three of the power states: OFF, OFFLINE, and ONLINE.

3.1.2 CapCharacterSet Property

Description

This property is initialized by the **Open** method according to the “Multi Byte Character Type” setting of SetupPOS. However, after the **Claim** method is executed, the value may be changed depending on the actual language of the device.

The following value is set.

Value	Meaning
CharacterSetCapability.Ascii	This value is set for devices with the ANK specification.

3.1.3 CapSlpBothSidesPrint Property

Description

This property is initialized to false by the **Open** method. However, after the **Claim** method is executed, it may be changed depending on whether the device supports reverse side printing.

3.1.4 CharacterSet Property

Description

Only a value in the **CharacterSetList** property can be set.
The property is initialized to one of the following values.

Value	Meaning
437	Code page 437.

3.1.5 CharacterSetList Property

Description

This property is initialized by the **Open** method.

3.1.6 MapMode Property

Description

All properties and parameters of a method affected by the **MapMode** property are processed by “dot”.

When the **MapMode** property is other than MapMode.Dots, an error of ± 1 may be produced in the property and the parameter of the method affected by the **MapMode** property.

3.1.7 *StnLineChars* Property

Description

Stn of the property name corresponds to **Rec**, and **Slp**.

After the **Claim** method is executed, the value may be changed according to the specification of the device.

Only a value in the **StnLineCharsList** property can be set.

If the value set is other than a value in the **StnLineCharsList** property and is smaller than the maximum value supported by the printer, the value is set to a value that is larger and the nearest value in the **StnLineCharsList** property.

If the device supports reverse side printing, switching the printing side of slips by the **ChangePrintSide** method changes the value to the selected print side. This information is managed separately for printing sides.

3.1.8 *StnLineCharsList* Property

Description

Stn of the property name corresponds to **Rec**, and **Slp**.

After the **Claim** method is executed, the value may be changed according to the specification of the device.

3.1.9 *StnLineSpacing* Property

Description

Stn of the property name corresponds to **Rec**, and **Slp**.

A value smaller than the **StnLineHeight** property can also be set. If a value smaller than the **StnLineHeight** property is set, character strings in the first and second lines overlap when printed. However, the characters strings do not overlap when printing on a thermal station or in rotated 90-degree print mode.

If the device supports reverse side printing, switching the printing side of slips by the **ChangePrintSide** method changes the value to the selected print side. This information is managed separately for printing sides.

3.1.10 *StnLineWidth* Property

Description

Stn of the property name corresponds to **Rec**, and **Slp**.

After the **Claim** method is executed, the value may be changed according to the specification of the device.

3.1.11 *StnLetterQuality* Property

Description

Stn of the property name corresponds to **Rec**, and **Slp**.

When this property is changed, other properties, such as printing resolution and control method of the head are changed.

They vary depending on the head type of the station.

However, changing the printing resolution does not change the values of properties such as **StnLineWidth** and **StnLineSpacing**.

Station	Description of Change
Receipt • Slip	<p>Specifying/canceling of unidirectional printing.</p> <p>Setting/canceling of smoothing of double height/width characters.</p> <p>Changing of printing resolution.</p> <p>Switching between economy and fine (amount of ink used).</p>

3.1.12 *StnSidewaysMaxLines* Property

Description

Stn of the property name corresponds to **Rec** and **Slp**.

After the **Claim** method is executed, the value may be changed according to the specification of the device.

3.1.13 *SlpLinesNearEndToEnd* Property

Description

This property is always set to 0.

3.1.14 *FontTypefaceList* Property

Description

This property is initialized by the **Open** method.

In the case of TM-J7500/J7600, it may be changed to an empty character string after the **Claim** method is executed, depending on whether the OCR-B font is installed.

The following characters can be printed with the OCR-B font: '0' to '9' '+'

'-' ' ' ',' '<' '>.'

3.1.15 DeviceEnabled Property

Description

When the **DeviceEnabled** property is set to TRUE first after the **Claim** method is executed, device initialization is performed.

In the following states, device initialization cannot be done:

- Offline (e.g. Cover open, out of paper, etc.)
- Error (e.g. Paper jam)

When the **DeviceEnabled** property is set to TRUE, the printer state is notified via a **StatusUpdateEvent**.

If the **StatusUpdateEvent** for the printer stat is not defined in UPOS, however, the **StatusUpdateEvent** cannot be notified. In this case, the printer status can be found by examining the exception that is notified when the method is executed.

If the device initialization cannot be done when the **DeviceEnabled** property is set to TRUE, a device status is checked at an interval of 1 second, and it is repeated until the device initialization is performed completely.

The device initialization status can be found by enabling the **PowerNotify** property.

When StatusPowerOnline is notified by a **StatusUpdateEvent**, the initialization process is complete.

In addition, the initialization process may take several seconds depending on the connection speed and the image registration status.

3.2 Methods

The methods listed below differ from functions described in UPOS.

3.2.1 Claim Method

Description

The device connection state is confirmed. If the device is not connected, or if the power is OFF, an exception is thrown. In the case of a Serial connection, the device connection state cannot be confirmed. In this case, Success is always returned. In the case of a USB connection where the "Port Name Type" is set to "Device Name", if the printer is in an error state, an exception is thrown.

3.2.2 Release Method

Description


The connection is disconnected at the port where the device is connected.

3.2.3 CheckHealth Method

Description

All functions of the **CheckHealth** method are supported.

Level	Outline of Function
HealthCheckLevel.Internal	The state of the device is checked based on the information held in the current ServiceObject (no action is taken on the device).
HealthCheckLevel.External	A test print of the following character strings is performed on the station selected currently. External HCheck !! EPSON UPOS ADK ServiceVersion=version of the ServiceObject DeviceName=device name
HealthCheckLevel.Interactive	The following dialog box appears.

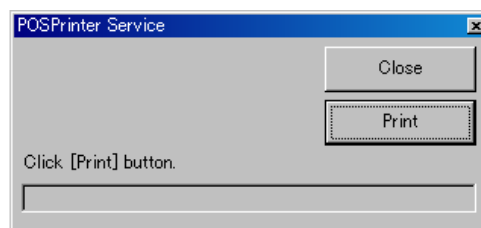

Press the Print button to perform the test.

A test print of the following character strings is performed on the station currently selected.

- Interactive HCheck !!
- EPSON UPOS ADK
- ServiceVersion=version of the ServiceObject
- DeviceName=device name

Press the Close button to end the test.

The results are stored in the **CheckHealthText** property.

And besides, the following value is retrieved as the returned value of method.

Level	Value	Meaning
HealthCheckLevel.Internal		
	Internal HCheck: Successful	The CheckHealth method finished normally.
	Internal HCheck: Error-<Message>	The CheckHealth method finished with an error. The Message contains error information.
HealthCheckLevel.External		
	External HCheck: Successful	The CheckHealth method finished normally.
	External HCheck: Error-<Message>	The CheckHealth method finished with an error. The Message contains error information.
HealthCheckLevel.Interactive		
	Interactive HCheck: Canceled	The CheckHealth method finished without doing anything.
	Interactive HCheck: Complete	After the last operation ended normally, the CheckHealth method finished.
	Interactive HCheck: Error-<Message>	After the last operation finished with an error, the CheckHealth method finished. The Message contains error information.

3.2.4 ClearOutput Method

Description

In asynchronous mode, only output data that is non-transmitted transaction data is deleted. Therefore, data in the current transmission and data sent to the device but not printed is not deleted.

3.2.5 DirectIO Method

Description

This method can be used when the **DeviceEnabled** property is true. The **DirectIO** method supports the following functions.

command	Outline of Function
PTR_DI_OUTPUT_NORMAL	Sends the specified code to the device using flow control.
PTR_DI_OUTPUT_REALTIME	Sends the specified code to the device without using flow control.
PTR_DI_PANEL_SWITCH	Enables/disables the panel switch.
PTR_DI_RECOVER_ERROR	Recovers from a recoverable error.
PTR_DI_DELETE_NVIMAGE	Deletes the bitmap saved to NVRAM.
PTR_DI_CODE128_TYPE	Specifies the default code for Code128.
PTR_DI_BINARY_CONVERSION	Specifies the character string format specified in the parameter of the string type.
PTR_DI_GET_SUPPORT_FUNCTION	Returns the functions supported by the device currently connected.
PTR_DI_RING_BUZZER_WITH_TIME	Executes buzzer control.

- **PTR_DI_OUTPUT_NORMAL Command**

Parameter

<i>command</i>	PTR_DI_OUTPUT_NORMAL
<i>data</i>	Not used
<i>object</i> (byte[]type)	Transmission data

Description

Sends data specified by the *object* parameter to the device directly using flow control.

Use this command only when sending an ESC/POS command to the device.

The ServiceObject does not check data sent by this command. Do not send ESC/POS commands that change the line feed amount or font size, since doing so will hinder the subsequent operations of the ServiceObject.

- **PTR_DI_OUTPUT_REALTIME Command**

Parameter

<i>command</i>	PTR_DI_OUTPUT_REALTIME
<i>data</i>	Not used
<i>object</i> (byte[]type)	Transmission data

Description

Sends data specified by the *object* parameter to the device directly without using flow control.

Use this command only when sending a real-time ESC/POS command to the device.

As this command is sent without using flow control, garbled printing may occur if there is any unsent data in the ServiceObject.

● PTR_DI_PANEL_SWITCH Command

Parameter

<i>command</i>	PTR_DI_PANEL_SWITCH
<i>data</i>	Specify ON/OFF (0 is OFF and 1 is ON)
<i>object</i>	Not used

Description

Enables/disables the panel switch.

The panel switch is enabled if *data* is set to ON (1) and disabled if *data* is set to OFF (0).

Depending on the type of device, there may be exceptions such as the following.

- During switch standby when a macro is being executed, the switch is enabled regardless of the setting.
- When the cover is open, the switch is disabled regardless of the setting.

● PTR_DI_RECOVER_ERROR Command

Parameter

<i>command</i>	PTR_DI_RECOVER_ERROR
<i>data</i>	Not used
<i>object</i>	Not used

Description

Recovers from a recoverable error.

This command sends the error recovery command to the device without using flow control.

Do not use this command when the device is in a non-recoverable error state.

● PTR_DI_DELETE_NVIMAGE Command

Parameter

<i>command</i>	PTR_DI_DELETE_NVIMAGE
<i>data</i>	Specify the key code to delete
<i>object</i>	Not used

Description

Deletes the image of the key code specified for the *data* parameter from NVRAM.

Use the key code reported by the **DirectIOEvent** event when **SetBitmap** method is executed.

If the key code is specified by PTR_DI_DELETE_ALL, all the images saved to NVRAM are deleted.

If an image saved to NVRAM is deleted, the following information is also deleted.

- The image information of NVRAM on the PC.
- The registration information of the **SetBitmap** method associated with the key code to be deleted.

● PTR_DI_CODE128_TYPE Command

Parameter

<i>command</i>	PTR_DI_CODE128_TYPE
<i>data</i>	Specify one of the following. <ul style="list-style-type: none"> • PTR_DI_CODE_A • PTR_DI_CODE_B • PTR_DI_CODE_C
<i>object</i>	Not used

Description

Specifies the default code for the CODE128 barcode.

To print the CODE128 barcode, codes A, B, and C need to be specified at the beginning of the printing data. If they are not specified at the beginning of the printing data of the **PrintBarCode** method, use the code specified with this command to print the CODE128 barcode.

The default setting is PTR_DI_CODE_A.

● PTR_DI_BINARY_CONVERSION Command

Parameter

<i>command</i>	PTR_DI_BINARY_CONVERSION
<i>data</i>	Specify one of the following. <ul style="list-style-type: none"> • PTR_DI_BC_NONE • PTR_DI_BC_NIBBLE • PTR_DI_BC_DECIMAL
<i>object</i>	Not used

Description

Specifies the character string format specified in the parameter of the string type.

The specification is the same as that of the **BinaryConversion** property of OPOS.

Use this command for the printing of two dimensional codes and for a **CharacterSet** property for which Unicode specification is not possible.

The setting of this command is valid for the following methods.

- **PrintBarcode** method
- **PrintNormal** method (only when the **CharacterSet** property is a blank page [254, 255])
- **PrintImmediate** method (only when the **CharacterSet** property is a blank page [254, 255])

● PTR_DI_GET_SUPPORT_FUNCTION Command

Parameter

<i>command</i>	PTR_DI_GET_SUPPORT_FUNCTION
<i>data</i>	Not used.
<i>object</i>	Not used

Description

Indicates the functions supported by the currently connected device with the logical OR of the function flag, and stores the returned value in the Data property of DirectIOData.

The value 0 is always stored in the Data property.

- **PTR_DI_RING_BUZZER_WITH_TIME Command**

Parameter

<i>command</i>	PTR_DI_RING_BUZZER_WITH_TIME
<i>data</i>	Specifies the buzzer operating time (milliseconds).
<i>object</i>	Not used

Description

Sounds the buzzer for the time specified with the *data* parameter.

The settable buzzer operating time is 0 to 510 milliseconds.

This command can only be executed when the device is used with a network connection. If other connections are used, an exception is thrown.

3.2.6 ResetStatistics Method

- **Parameter type: Microsoft.PointOfService.StatisticCategories**

Parameter

Microsoft.PointOfService.StatisticCategories

Specify one of the following.

- `StatisticCategories.Upos`
- `StatisticCategories.Manufacturer`
- `StatisticCategories.All`

Description

Of the items included in the specified category, only the items for which O appeared for the permission reset in "[Appendix-F DeviceStatistics](#)" are reset.

All the statistics supported by the ServiceObject are defined in UPOS. If "StatisticCategories.Manufacturer" is specified, nothing is reset.

- **Parameter type: *String[]***

Parameter

String[]

An array of the item names to reset

Description

Of the items included in the specified category, only the items for which O appears for the reset permission in "[Appendix-F DeviceStatistics](#)" are reset when "U_", "M_", or an empty string is specified for item names.

If an illegal item name or non-resettable item name is included, this method reports an error. When this happens, correctly specified items are also not reset.

All the statistics supported by the ServiceObject are defined in UPOS. If "M_" is specified, nothing is reset.

3.2.7 ResetStatistic Method

Description

Of the items included in the specified category, only the items for which O appears for the reset permission in "[Appendix-F DeviceStatistics](#)" are reset when "U_", "M_", or an empty string is specified for item names.

If an illegal item name or non-resettable item name is specified, this method reports an error.

All the statistics supported by the ServiceObject are defined in UPOS. If "M_" is specified, nothing is reset.

3.2.8 RetrieveStatistics Method

- **Parameter type: Microsoft.PointOfService.StatisticCategories**

Parameter

Microsoft.PointOfService.StatisticCategories

Specify one of the following.

- StatisticCategories.Upos
- StatisticCategories.Manufacturer
- StatisticCategories.All

Description

The Statistics supported by ServiceObject are all defined in UPOS. If "StatisticCategories.Manufacturer" is specified, the minimum information specified by UPOS (the 4 items; UPOS version, manufacturer name, device name, and device category) is acquired.

- **Parameter type: *String[]***

Parameter	
<i>String[]</i>	An array of the item names to retrieve

Description

If an illegal item name is included, this method reports an error.

The Statistics supported by ServiceObject are all defined in UPOS. If "M_" is specified, the minimum information specified by UPOS (the 4 items; UPOS version, manufacturer name, device name, and device category) is acquired.

- **Parameter type: None**

Description

The information of all defined items is retrieved.

3.2.9 RetrieveStatistic Method**Description**

If an illegal item name is included, this method reports an error.

If multiple item names separated by commas are specified (UPOS Specification), an error is reported.

The Statistics supported by ServiceObject are all defined in UPOS. If "M_" is specified, the minimum information specified by UPOS (the 4 items; UPOS version, manufacturer name, device name, and device category) is acquired.

3.2.10 UpdateStatistics Method

- **Parameter type: Microsoft.PointOfService.Statistic[]**

Parameter

Microsoft.PointOfService.Statistic[]

Specifies *Microsoft.PointOfService.Statistic* array for which item names and new values have been set.

Description

Of the items included in the specified category, only the items for which O appears for the update permission in "[Appendix-F DeviceStatistics](#)" are updated when "U_", "M_", or an empty string is specified for item names.

If an illegal item name or non-updatable item name is included, this method reports an error. In this case, correctly specified items are also not updated.

The Statistics supported by ServiceObject are all defined by UPOS. If "M_" is specified, nothing is updated.

- **Parameter type: Microsoft.PointOfService.StatisticCategories**

Parameter

Microsoft.PointOfService.StatisticCategories

Specify one of the following.

- StatisticCategories.Upas
- StatisticCategories.Manufacturer
- StatisticCategories.All

Object

Specify the new value after updating.

Description

Of the items included in the specified category, only the items for which O appeared for the update permission in “[Appendix-F DeviceStatistics](#)” are updated.

All the statistics supported by the ServiceObject are defined in UPOS. If “StatisticCategories.Manufacturer” is specified, nothing is update.

3.2.11 UpdateStatistic Method

Description

Of the items included in the specified category, only the items for which O appears for the update permission in “[Appendix-F DeviceStatistics](#)” are updated when "U_", "M_", or an empty string is specified for item names.

If an illegal item name or non-updatable item name is specified, this method reports an error.

The Statistics supported by ServiceObject are all defined by UPOS. If “M_” is specified, nothing is updated.

3.2.12 BeginInsertion Method

Description

If this method is called, the device prepares to receive the slip by opening the insertion opening for slips and switching the mode to insertion mode. This method is executed as a pair together with the **EndInsertion** method for controlling slip insertion.

The specified maximum standby time is the amount of the time the device waits for a slip to be set in the insertion opening after switching to insertion mode. The device remains in insertion mode if the specified maximum standby time elapses without a slip having been inserted. Furthermore, output to the printer is not possible while in insertion mode.

3.2.13 BeginRemoval Method

Description

When this method is executed, the slip paper is ejected. The device continues to wait until the slip is completely ejected from the device.

If the time of the *timeout* parameter elapses without the slip having been completely ejected from the device, an exception is thrown and the `ErrorCode` is `ErrorCode.Timeout`.

3.2.14 ChangePrintSide Method

Description

<TM-J7000, TM-J7100>

If the slip station is in transaction mode or rotated 90-degree print mode when this method is used to change the print side of the slip, the data held in the `ServiceObject` is printed before the print side is changed. Furthermore, transaction mode or rotated 90-degree print mode ends.

<TM-J7500, TM-J7600>

CapSlpBothSidesPrint property is false the exception of "there is not a function" is thrown.

3.2.15 MarkFeed Method

Description

CapRecMarkFeed property is `PrinterMarkFeeds.None` the exception of "there is no function" is thrown.

3.2.16 EndInsertion Method

Description

When this method is executed, when a slip is placed in the insertion, if the mode is the insertion mode, a slip is inserted.

When executing this method after the MICR has read a check, feed the paper to the top of form. When this method is executed at times other than these, an exception is thrown.

3.2.17 EndRemoval Method

Description

An exception is thrown if the slip station is in a selected state.

The selected state of a slip station refers to the following states.

- A slip is inserted in the slip station.
- A slip is being inserted.
- A slip is being ejected or has been ejected but is not completely removed from the device.
- A slip is placed in the slip station.

3.2.18 CutPaper Method

Description

If the *percentage* parameter is 0, the method process ends without sending the command.

If the *percentage* parameter is from 1 to 100, activate the cutter to perform a partial cut leaving one point uncut.

3.2.19 PrintNormal Method

Description

Although the UPOS specification is such that an error is generated during synchronous printing if there is no line feed code, printing is successful when this method is executed even if a character string contains no line feed code.

See the table "[Appendix-E Escape Sequences](#)" for escape sequences supported by this device.

3.2.20 PrintImmediate Method

Description

Although “this method tries to print its data immediately – that is, as the very next printer operation” is written in the UPOS, with this ServiceObject, the data of multiple transactions may be sent to the device during asynchronous printing. Therefore, data of the **PrintImmediate** method may not be printed immediately.

Although the UPOS specification is such that an error is generated during synchronous printing if there is no line feed code, printing is successful when this method is executed even if a character string contains no line feed code.

See the table “[Appendix-E Escape Sequences](#)” for escape sequences supported by this device.

3.2.21 PrintTwoNormal Method

Description

CapConcurrentRecSlp property is false the exception is thrown.

3.2.22 RotatePrint Method

Description

An exception is thrown for each of the following conditions, so the following method cannot be used.

Rotation	Methods	Mode
PrintRotation.Right90	CutPaper	Rotated 90-degree print
PrintRotation.Left90	Same as above	Same as above

When ESC|#B is used to print an image, rotated printing takes places regardless of the PrintRotation.Bitmap specification of the *rotation* parameter.

In the case of rotated 90-degree print mode, the following escape sequences are ignored even if the device supports the functions.

- ESC | P
- ESC | fP
- ESC | sP
- ESC | sL
- ESC | #rF
- ESC | cA
- ESC | rA

The *alignment* parameter of each of the **SetBitmap** method, **PrintBitmap** method, **PrintMemoryBitmap** method, and **PrintBarCode** method is also ignored.

If the current print mode is PageMode print, it is not possible to switch to rotated 90-degree print mode or rotated 180-degree print mode.

If an exception is thrown when this method is called, the rotated print mode is not switched.

In the case of rotated 90-degree print mode, buffering data saved to the ServiceObject is not cleared.

An exception is thrown if this method is executed while printing the reverse side of a slip.

3.2.23 PrintBarCode Method

Description

Although both of the following affect rotated printing, settings made with the **RotatePrint** method take priority.

In other words, the **RotateSpecial** property setting is ignored when rotated printing of barcodes is specified with the **RotatePrint** method.

- **RotatePrint** method (specify PrintRotation.Barcode for the *rotation* parameter)
- **RotateSpecial** property

In the case of rotated 90-degree printing, operation differs depending on whether data buffering is performed. For details, refer to UPOS.

The following types of barcode can be printed using the **PrintBarCode** method.

- CODE128
- CODE128 Parsed
- CODE93
- CODABAR
- ITF
- CODE39
- JAN13 (EAN13)
- JAN8 (EAN8)
- UPC-E
- UPC-A
- PDF417

Rotated 90-degree print mode for printing the barcode cannot be used on a slip station.

Rotated 90-degree print mode cannot be used for printing of PDF417.

3.2.24 PrintBitmap Method

Description

This method enables a jpeg file, gif file, or Windows bmp file to be specified.

The resolutions for printing images are as follows.

Station	Landscape	Portrait
Receipt	180 dpi	180 dpi
Slip	180 dpi	180 dpi

3.2.25 PrintMemoryBitmap Method

Description

Only bitmaps created from jpeg files, gif files, or Windows bmp files are supported. The resolutions for printing images are as follows.

Station	Landscape	Portrait
Receipt	180 dpi	180 dpi
Slip	180 dpi	180 dpi

3.2.26 SetBitmap Method

Description

This method enables a jpeg file, gif file, or Windows bmp file to be specified.

For the resolutions for printing images, refer to the **PrintBitmap** method. This device can download images to non-volatile memory and volatile memory.

Use SetupPOS utility to set whether to download to non-volatile memory. The upper limit for storing images is nine, regardless of the stations.

The sizes for images that can be downloaded to the device are shown below.

Volatile Memory:

Downloading can be performed until 12304, the total memory size allocated for image use, is reached.

Non-volatile Memory:

Downloading can be performed until there is no longer any non-volatile memory available for storing images (memory capacity differs depending on the device settings).

The size of memory used to store one image can be calculated as follows.

Size = (((number of dots high + 7) ÷ 8) × number of dots wide + 16) ×
print color

3.2.27 SetLogo Method

Description

The following escape sequences cannot be specified in data saved using this method. If they are specified, an exception is thrown.

- ESC | tL
- ESC | bL

3.2.28 TransactionPrint Method

Description

If the current rotated print mode is rotated 90-degree print mode, the mode cannot be switched to transaction mode.

When switching out of transaction mode, any buffering data saved to the ServiceObject in rotated 90-degree print mode is printed and rotated 90-degree print mode is maintained.

If an exception is thrown when this method is called, the transaction mode is not switched. Furthermore, buffering data saved to the ServiceObject while in transaction mode is not cleared.

3.2.29 PageModePrint Method

Description

Since an exception is thrown with the following conditions, the methods below cannot be used.

control	Methods	Mode
PageModePrintControl.PageMode	CutPaper RotatePrint ChangePrintSide (Setting the mode for PageMode printing of the slip station.)	PageModePrint

With PageMode printing, the following escape sequences are ignored even if the device supports the function.

- ESC | P
- ESC | fP
- ESC | sP
- ESC | sL
- ESC | #rF
- ESC | #E

If the current rotation print mode is rotated 90-degree print mode or rotated 180-degree print mode, it is not possible to switch to PageMode printing.

If, while in the transaction printing mode, either of the **PageModePrint** methods, PageModePrintControl.Normal or PageModePrintControl.PrintSave are executed, the PageMode printing data is buffered into the transaction printing buffer.

Properties related PageMode is initialized with following values only when it calls with DeviceEnabled=true for the first time.

- PageModePrintArea(0,0,0,0)

The values saved in this property is set when the page mode is started by PageModePrint method. Also, It is not initialized even if page mode printing is terminated by the PageModePrint method.

When this method is invoked and an exception is thrown, the PageMode printing mode is not switched. In addition, with PageMode printing, data buffered in ServiceObject is not cleared.

3.3 Events

3.3.1 DirectIOEvent

The properties listed below differ from functions described in UPOS.

- **PTR_DIE_RESPONSE Event Number**

Property

<i>EventNumber</i>	PTR_DIE_RESPONSE
<i>Data</i>	0 (not used)
<i>Object</i>	Stores the response from the printer

Description

When the PTR_DI_OUTPUT_NORMAL or PTR_DI_OUTPUT_REALTIME command of the **DirectIO** method or the **PrintNormal** method/ **PrintImmediate** method involving ESC|#E results in the sending of an ESC/POS command that has a response from the device, the response is stored in the *Object* property and reported. The ESC/POS commands capable of notification as a response are as follows.

- ESC u
- ESC v
- GS l (printer ID of 1 byte)
- GS r
- DLE EOT

When a network connection is being used and the Ink on Paper for Completion check box of SetupPOS Settings is selected, this event cannot notify of the response from the printer.

- **PTR_DIE_SET_BITMAP_MODE Event Number**

Property

<i>EventNumber</i>	PTR_DIE_SET_BITMAP_MODE
<i>Data</i>	Image save method
<i>Object</i>	Stores the key code

Description

Notifies of the save method used when the **SetBitmap** method saved an image.

One of the following values is set to the *Data* property.

Data	Meaning
PTR_DIE_MEMORY	Stored in the ServiceObject
PTR_DIE_VRAM	Stored in volatile memory of the printer
PTR_DIE_NVRAM	Stored in NVRAM of the printer

If the image saved by the **SetBitmap** method uses NVRAM, the key code used when saving to the *Object* property is stored.

3.3.2 ErrorEvent

Description

If the **DeviceEnabled** property becomes false while there is an **ErrorEvent** event queued state, the ServiceObject assumes that the *ErrorResponse* property has been set to ErrorResponse.Retry and performs the corresponding processing. Therefore, asynchronous output data is output again when the **DeviceEnabled** property becomes true. To prevent this data from being output again, execute the **ClearOutput** method.

Appendix-A Revision history

A.1 EPSON OPOS ADK for .NET 1.11

- (1) Microsoft POS for .NET 1.11 is supported.
- (2) Changed Error codes for Hydra Devices.
- (3) Changed initialization sequence.

A.2 EPSON OPOS ADK for .NET 1.9

- (1) Microsoft POS for .NET 1.1 is supported.

A.3 EPSON OPOS ADK for .NET 1.8

POS Device driver complied with Microsoft POS for .NET 1.0 specification has been provided.

This version has been created based on EPSON OPOS ADK 2.40.

The following shows the difference between this version and EPSON OPOS ADK2.40.

Differences from EPSON OPOS ADK 2.40

- (1) All **ErrorCode** resulting in an exception being thrown and **ErrorCodeExtended** have been revised.
- (2) Commands that can be used with the **DirectIO** method were deleted or integrated. Therefore, some commands have been deleted or shifted to **SetupPOS**.
- (3) The **DeviceEnabled** property state was deleted from the issue conditions of queued events. Therefore, an event may be reported even if the **DeviceEnabled** property is in the false state.
- (4) The **SetBitmap** method dynamically saves an image to the most suitable location. The **DirectIOEvent** event notifies of the save location. The **DirectIOEvent** event notifies of the save location even if the device is set not to use NVRAM.
- (5) The print character count, print line count, line feed amount, and barcode print count of rotated 90-degree print mode and transaction print mode are reflected in the values that can be retrieved by the **RetrieveStatistics** method when printing is actually performed.

- (6) When the **Open** method is executed, a communication control class instance is generated. An exception is thrown if a communication control class instance is not generated when the **Open** method is executed.
- (7) When one cartridge is shared by multiple stations, the properties of each of the stations are set to the same values. The same status is reported twice because a **StatusUpdateEvent** is generated for each of the stations.
- (8) **StatusUpdateEvent** events related to ink cartridges are notified for each cartridge. Therefore, the same event is reported twice for a model containing two color ink cartridges.
- (9) After the MICR has executed the **BeginInsertion** method and **EndInsertion** method, and when the printer **BeginInsertion** method and **EndInsertion** method is executed, SUCCESS is returned. In this case, the slip paper is fed to the start position when the **EndInsertion** method is executed.
- (10) If the **StnLetterQuality** property is set to false, the image is sent with lower resolution. Therefore, if the **PrintBitmap** method and **SetBitmap** method are executed with this setting, the performance of the methods improves, but the image printing quality may fall.
- (11) UPOS1.9 is supported.

Appendix-B SetupPOS Settings

This is the settings screen for the TM-J7600.

B.1 Verbose Error Codes Check Box

Description

Sets the error code type for during output.

State	Meaning
Checkmark added	Sets the timeout to ErrorCodeExtended for an error that occurs during output.
No checkmark added	Sets the printer state as is to ErrorCode or ErrorCodeExtended, regardless of whether the error occurred during output.

Default: no checkmark added

For some devices, this setting is only possible when there is either a parallel or a network connection.

B.2 CharacterSet Matches Device Check Box

Description

Sets whether the setting for the international character set is changed automatically to match the value of the **CharacterSet** property.

State	Meaning
Checkmark added	Sets the international character set to match the value of the CharacterSet property.
No checkmark added	Sets the international character set of America in the CharacterSet property.

Default: checkmark added

B.3 Ink on Paper for Completion Check Box

Description

Sets whether to check that printing operation is complete.

State	Meaning
Checkmark added	Judges the printing method to be complete when the device completes printing.
No checkmark added	Judges the printing method to be complete when data output is complete.

- **When set to judge method output to be complete when the device completes printing**

Printing on the device and the printing method are not completely synchronized. The method can be completed quickly.

If the value of the **AsyncMode** property is set to true, the completion of printing is reported before the device actually completes printing because the **OutputCompleteEvent** event considers the printing method to be complete when the data output is complete.

Printing is judged to be successful if method output completes even when an error was generated on the device during printing.

Default: checkmark added

B.4 Save Images in NVRAM Check Box

Description

Sets whether the image specified when executing the **SetBitmap** method is saved to NVRAM of the device.

State	Meaning
Checkmark added	Saves the image to NVRAM of the device.
No checkmark added	Does not save the image to NVRAM of the device.

- **When set to save the image to NVRAM of the device**

The saved image can even be printed if the application is restarted.

The key code saved to the *Object* property of the **DirectIOEvent** event is set.

Default: no checkmark added

B.5 Increase Receipt CPI Check Box

Description

Sets whether to increase the number of characters printed on one line of a receipt.

State	Meaning
Checkmark added	Increases the number of characters printed on one line of a receipt.
No checkmark added	Does not increase the number of characters printed on one line of a receipt.

- **When set to increase the number of characters printed on one line of a receipt.**

The value of the **RecLineChars** property increases.

Default: no checkmark added

B.6 Increase Slip CPI Check Box

Description

Sets whether to increase the number of characters printed on one line of a slip.

State	Meaning
Checkmark added	Increases the number of characters printed on one line of a slip.
No checkmark added	Does not increase the number of characters printed on one line of a slip.

- **When set to increase the number of characters printed on one line of a slip.**

The value of the **SlpLineChars** property increases.

Default: no checkmark added

B.7 Extend Rotate Print Area Check Box (TM-J7100/TM-J7600)

Description

Sets whether to extend the rotate print area.

State	Meaning
Checkmark added	Extends the rotate print area.
No checkmark added	Does not extend the rotate print area.

- **When set to extend the rotate print area**

The values of the following properties increase.

- **RecSidewaysMaxChars** property
- **SlpSidewaysMaxChars** property
- **PageModeArea** property

Default: no checkmark added

B.8 Slip Reverse Eject Check Box

Description

Sets whether to change the eject direction of slips.

State	Meaning
Checkmark added	Ejects slips toward the front.
No checkmark added	Ejects slips toward the back.

- **When set to eject slips toward the front**

When the **BeginRemoval** method is executed while a slip is set in the device, the slip can be ejected toward the front.

Default: no checkmark added

B.9 Halftone Method Combo Box

Description

Sets the halftone method type used during image printing (execution of **PrintBitmap** method).

Item	Meaning
Threshold	Uses the threshold method (monochrome conversion) on the specified image file, and then outputs it to the device.
Extraction	Performs extraction on the specified image file, and then outputs it to the device. This item can be selected when the device can perform two color printing.
Error Diffusion	Performs error diffusion processing on the specified image file, and then outputs it to the device.
Dithering	Performs dithering processing on the specified image file, and then outputs it to the device.

Default: Threshold

B.10 Device Font Type Combo Box

Description

Sets the multi-byte character font of the device.

Item	Meaning
None (ANK)	The device has no multi-byte character font.

Default: None (ANK)

B.11 Secondary Color Combo Box (TM-J7100/TM-J7600)

Description

Sets the secondary color of the ink cartridge.

Item	Meaning
Red	The secondary color is red.
Green	The secondary color is green.
Blue	The secondary color is blue.

When the **PrintBitmap** method was used to perform two color printing, the secondary color becomes that set as the custom color.

When the escape sequences of the **PrintNormal** and **PrintImmediate** methods are used to perform custom color printing, the set color is used for printing.

Default: Red

B.12 Receipt Width Combo Box

Description

Sets the receipt paper width.

Item	Meaning
58 mm	The receipt width is 58 mm.
70 mm	The receipt width is 70 mm.
76 mm	The receipt width is 76 mm.
82 mm	The receipt width is 82 mm.

Default: 76 mm

Appendix-C Hardware Settings

- **DIP Switch Settings**

Set the DIP switches of this device as shown below.

1) Serial connection

DIP-SW 1

No.	Setting	
1	OFF	Fixed to OFF
2	ON	Note 1
3	OFF	Fixed to OFF
4	OFF	Fixed to OFF
5	OFF	Note 2
6	OFF	Note 2
7	OFF	Note 3
8	OFF	Note 3

Note 1: Set whether to use the memory switches or DIP switches to set the transmission speed with 2 of DIP-SW1.

Note 2: Set the parity with 5 and 6 of DIP-SW1.

DIP Switch 1 Parity Settings

SW No.	Function	ON	OFF	Default
1-5	Parity check	Parity	No parity	OFF
1-6	Parity selection	Even parity	Odd parity	OFF

Note 3: Set the transmission speed with 7 and 8 of DIP-SW1.

DIP Switch 1 Transmission Speed Switching

SW1-7	SW1-8	Baud Rate (bps)
ON	ON	9600
OFF	ON	19200
ON	OFF	38400
OFF	OFF	115200

2) Parallel connection

DIP-SW 1

No.	Setting	
1	OFF	Fixed to OFF
2	OFF	Fixed to OFF
3	OFF	Fixed to OFF
4	OFF	Fixed to OFF
5	OFF	Fixed to OFF
6	OFF	Fixed to OFF
7	OFF	Fixed to OFF
8	OFF	Fixed to OFF

3) USB connection and Network connection

DIP-SW 1

No.	Setting	
1	OFF	Fixed to OFF
2	OFF	Fixed to OFF
3	OFF	Fixed to OFF
4	OFF	Fixed to OFF
5	OFF	Fixed to OFF
6	OFF	Fixed to OFF
7	OFF	Fixed to OFF
8	OFF	Fixed to OFF

● Memory Switch Settings

Set the memory switches of this device as shown below.

Mem-SW 1

No.	Setting
1	ON
2	-
3	OFF
4	OFF
5	OFF
6	OFF
7	OFF
8	OFF

Note 1

Note 2

Fixed to OFF Note 3

Fixed to OFF Note 3

Note 4

Note 5

Notes 5 and 6

Mem-SW 2

No.	Setting
1	-
2	ON
3	-
4	-
5	-
6	-
7	-
8	-

Recommended

Mem-SW 8

No.	Setting
1	-
2	-
3	-
4	-
5	-
6	OFF
7	OFF
8	OFF

Note 7

Note 7

Fixed to OFF Note 3

Note 1: Set to ON for serial or Parallel connection, and set to OFF for network or USB connection.

Note 2: Set ON when using a parallel connection and set OFF when using a connection other than Parallel connection.

Note 3: The setting is fixed by the ServiceObject.

Note 4: Set the LineDisplay connection state with 6 of Mem-SW1.

Note 5: Set the reset signal selection with 7 and 8 of Mem-SW1 (serial connection only).

Note 6: Set 8 of Mem-SW1 to ON for a network connection and to OFF for an connection other than network.

Note 7: The setting is changed by the SetupPOS utility settings.

Appendix-D Default Values of Properties

● Common Settings

Property	Setting Value/Default Value	Range of Settings
CapCompareFirmwareVersion	false	—
CapPowerReporting	(Serial connection): PowerReporting.Standard (Other connection): PowerReporting.Advanced	—
CapStatisticsReporting	true	—
CapUpdateFirmware	false	—
CapUpdateStatistics	true	—
CheckHealthText	""	—
Claimed	false	—
DeviceEnabled	false	true, false
OutputID	0	—
PowerNotify	PowerNotification.Disabled	PowerNotification.Disabled, PowerNotification.Enabled
PowerState	PowerState.Unknown	—
DeviceDescription	Refer to "Device Specific Property Settings".	—
DeviceName	Refer to "Device Specific Property Settings".	—
State	ControlState.Idle	—
AsyncMode	false	true, false
CapCharacterSet	CharacterSetCapability.Ascii	—
CapConcurrentJmRec	false	—
CapConcurrentJmSlp	false	—
CapConcurrentRecSlp	false	—
CapConcurrentPageMode	false	—
CapCoverSensor	true	—
CapMapCharacterSet	false	—
CapTransaction	true	—
CartridgeNotify	PrinterCartridgeNotify.Disabled	PrinterCartridgeNotify.Disabled PrinterCartridgeNotify.Enabled
CharacterSet	437	One of the values in CharacterSetList
CharacterSetList	437, 850, 852, 858, 860, 863, 865, 866, 999, 1252	—
ErrorLevel	PrinterErrorLevel.None	—
ErrorStation	PrinterStation.None	—
ErrorString	""	—
FlagWhenIdle	false	true, false
FontTypefaceList	Refer to "Device Specific Property Settings".	—
MapCharacterSet	false	—
MapMode	MapMode.Dots	MapMode.Dots, MapMode.Twips, MapMode.English, MapMode.Metric
PageModeArea	Refer to "Settings Related to PageMode".	—
PageModeDescriptor	Refer to "Settings Related to PageMode".	—
PageModeHorizontalPosition	Refer to "Settings Related to PageMode".	Refer to "Settings Related to PageMode".
PageModePrintArea	Refer to "Settings Related to PageMode".	Refer to "Settings Related to PageMode".
PageModePrintDirection	Refer to "Settings Related to PageMode".	Refer to "Settings Related to PageMode".
PageModeStation	PrinterStation.None	PrinterStation.Receipt, PrinterStation.Slip
PageModeVerticalPosition	Refer to "Settings Related to PageMode".	Refer to "Settings Related to PageMode".
RotateSpecial	PrintRotation.Normal	PrintRotation.Normal, PrintRotation.Right90, PrintRotation.Left90, PrintRotation.Rotate180
CoverOpen	false	—

● **Settings Related to Receipts**

Property	Setting Value/Default Value	Range of Settings
CapRec2Color	Refer to "Device Specific Property Settings".	—
CapRecBarCode	true	—
CapRecBitmap	true	—
CapRecBold	true	—
CapRecCartridgeSensor	PrinterCartridgeSensors.Removed, PrinterCartridgeSensors.Empty, PrinterCartridgeSensors.NearEnd, PrinterCartridgeSensors.Cleaning	—
CapRecColor	Refer to "Device Specific Property Settings".	—
CapRecDhigh	true	—
CapRecDwide	true	—
CapRecDwideDhigh	true	—
CapRecEmptySensor	true	—
CapRecItalic	false	—
CapRecLeft90	true	—
CapRecMarkFeed	PrinterMarkFeeds.None	—
CapRecNearEndSensor	true	—
CapRecPageMode	true	—
CapRecPapercut	true	—
CapRecPresent	true	—
CapRecRight90	true	—
CapRecRotate180	true	—
CapRecStamp	false	—
CapRecUnderline	true	—
RecBarCodeRotationList	PrintRotation.Normal, PrintRotation.Right90, PrintRotation.Left90, PrintRotation.Rotate180	—
RecBitmapRotationList	PrintRotation.Normal, PrintRotation.Right90, PrintRotation.Left90, PrintRotation.Rotate180	—
RecCartridgeState	PrinterColors.Primary	—
SlpCurrentCartridge	Refer to "Device Specific Property Settings".	Refer to "Device Specific Property Settings".
RecEmpty	false	—
RecLetterQuality	false	true, false
RecLineChars	Refer to "Settings Affecting Changing of Paper Width".	Refer to "Settings Affecting Changing of Paper Width".
RecLineCharsList	Refer to "Settings Affecting Changing of Paper Width".	—
RecLineHeight	24	The font height is adjusted to that of FontA or FontB specified in RecLineChars.
RecLineSpacing	30	0 to 255
RecLinesToPaperCut	6 Changing RecLineSpacing configures the setting as follows. $\text{RecLinesToPaperCut} = 180 \div \text{RecLineSpacing}$ (If the above calculation generates a remainder, perform the following calculation: $\text{RecLinesToPaperCut} = \text{RecLinesToPaperCut} + 1$)	—
RecLineWidth	Refer to "Settings Affecting Changing of Paper Width".	Refer to "Settings Affecting Changing of Paper Width".
RecNearEnd	false	—
RecSidewaysMaxChars	Refer to "Device Specific Property Settings".	—
RecSidewaysMaxLines	Refer to "Settings Affecting Changing of Paper Width".	—

● **Settings Related to Slips (Front Side)**

Property	Setting Value/Default Value	Range of Settings
CapSlp2Color	Refer to "Device Specific Property Settings".	—
CapSlpBarCode	true	—
CapSlpBitmap	true	—
CapSlpBold	true	—
CapSlpBothSidesPrint	Refer to "Device Specific Property Settings".	—
CapSlpCartridgeSensor	PrinterCartridgeSensors.Removed, PrinterCartridgeSensors.Empty, PrinterCartridgeSensors.NearEnd, PrinterCartridgeSensors.Cleaning	—
CapSlpColor	Refer to "Device Specific Property Settings".	—
CapSlpDhigh	true	—
CapSlpDwide	true	—
CapSlpDwideDhigh	true	—
CapSlpEmptySensor	true	—
CapSlpFullslip	true	—
CapSlpItalic	false	—
CapSlpLeft90	true	—
CapSlpNearEndSensor	true	—
CapSlpPageMode	true	—
CapSlpPresent	true	—
CapSlpRight90	true	—
CapSlpRotate180	true	—
CapSlpUnderline	true	—
SlpBarCodeRotationList	PrintRotation.Normal, PrintRotation.Rotate180	—
SlpBitmapRotationList	PrintRotation.Normal, PrintRotation.Right90, PrintRotation.Left90, PrintRotation.Rotate180	—
SlpCartridgeState	PrinterCartridgeStates.Unknown	—
SlpCurrentCartridge	Refer to "Device Specific Property Settings".	Refer to "Device Specific Property Settings".
SlpEmpty	true	—
SlpLetterQuality	false	true, false
SlpLineChars	Refer to "Device Specific Property Settings".	Refer to "Device Specific Property Settings."
SlpLineCharsList	Refer to "Device Specific Property Settings".	—
SlpLineHeight	24	The font height is adjusted to that of FontA or FontB specified in SlpLineChars.
SlpLinesNearEndToEnd	0	—
SlpLineSpacing	30	0 to 255
SlpLineWidth	Refer to "Device Specific Property Settings".	—
SlpMaxLines	0	—
SlpNearEnd	false	—
SlpPrintSide	PrintSide.Unknown	—
SlpSidewaysMaxChars	Refer to "Device Specific Property Settings".	—
SlpSidewaysMaxLines	Refer to "Device Specific Property Settings".	—

● **Settings Related to Slips (Reverse Side)**

Property	Setting Value/Default Value	Range of Settings
CapSlp2Color	Refer to "Device Specific Property Settings".	—
CapSlpBarCode	true	—
CapSlpBitmap	false	—
CapSlpBold	true	—
CapSlpBothSidesPrint	true	—
CapSlpCartridgeSensor	PrinterCartridgeSensors.Removed, PrinterCartridgeSensors.Empty, PrinterCartridgeSensors.NearEnd, PrinterCartridgeSensors.Cleaning	—
CapSlpColor	Refer to "Device Specific Property Settings".	—
CapSlpDhigh	true	—
CapSlpDwide	true	—
CapSlpDwideDhigh	true	—
CapSlpEmptySensor	true	—
CapSlpPageMode	false	—
CapSlpItalic	false	—
CapSlpLeft90	false	—
CapSlpNearEndSensor	false	—
CapSlpPresent	true	—
CapSlpRight90	false	—
CapSlpRotate180	true	—
CapSlpUnderline	true	—
SlpBarCodeRotationList	PrintRotation.Normal, PrintRotation.Rotate180	—
SlpBitmapRotationList	""	—
SlpCurrentCartridge	Refer to "Device Specific Property Settings".	Refer to "Device Specific Property Settings".
SlpEmpty	true	—
SlpLetterQuality	false	true, false
SlpLineChars	46	1 to 61 Numbers described in SlpLineCharsList can be set. For any other value, if the set value is smaller than the maximum value supported by the printer, the value is set to the nearest value that is larger than the specified value in SlpLineCharsList properties.
SlpLineCharsList	46, 61	—
SlpLineHeight	24	Adjusted to 24.
SlpLineSpacing	30	0 to 255
SlpLineWidth	552	—
SlpMaxLines	0	—
SlpNearEnd	false	—
SlpPrintSide	PrintSide.Unknown	—
SlpSidewaysMaxChars	0	—
SlpSidewaysMaxLines	0	—

● **Device Specific Property Settings**

Device	Property	Setting Value/Default Value	Range of Settings
TM-J7000	CapRec2Color	false	—
	CapRecColor	PrinterColors.Primary	—
	CapSlpBothSidesPrint	true	—
	CapSlpColor	PrinterColors.Primary	—
	FontTypefaceList	""	—
	DeviceDescription	EPSON TM-J7000 Printer	—
	DeviceName	TM-J7000	—
	RecCurrentCartridge	PrinterColors.Primary	—
	RecSidewaysMaxChars ^{Note 1}	73 (Font A), 97 (Font B)	—
	SlpCurrentCartridge	PrinterColors.Primary	—
	SlpLineChars	48	1 to 64 Numbers described in SlpLineCharsList can be set. For any other value, the value is set to the nearest value that is smaller in SlpLineCharsList.
	SlpLineCharsList	48, 64	—
TM-J7100	SlpLineWidth	576	—
	SlpSidewaysMaxChars ^{Note 2}	61 (Font A), 81 (Font B)	—
	SlpSidewaysMaxLines	19	—
	CapRec2Color	true	—
	CapRecColor	PrinterColors.Primary, PrinterColors.Custom1	—
	CapSlpBothSidesPrint	true	—
	CapSlpColor	PrinterColors.Primary, PrinterColors.Custom1	—
	FontTypefaceList	""	—
	DeviceDescription	EPSON TM-J7100 Printer	—
	DeviceName	TM-J7100	—
	RecCurrentCartridge	PrinterColors.Primary	PrinterColors.Primary, PrinterColors.Custom1
	RecSidewaysMaxChars ^{Note 1}	36 (Font A), 48 (Font B)	—
	SlpCurrentCartridge	PrinterColors.Primary	PrinterColors.Primary, PrinterColors.Custom1
	SlpLineChars	48	1 to 64 Numbers described in SlpLineCharsList can be set. For any other value, the value is set to the nearest value that is smaller in SlpLineCharsList.
	SlpLineCharsList	48, 64	—
	SlpLineWidth	576	—
	SlpSidewaysMaxChars ^{Note 2}	30 (Font A), 40 (Font B)	—
	SlpSidewaysMaxLines	19	—

TM-J7500	CapRec2Color	false	—
	CapRecColor	PrinterColors.Primary	—
	CapSlpBothSidesPrint	false	—
	CapSlpColor	PrinterColors.Primary	—
	FontTypefaceList	"OCR-B"	—
	DeviceDescription	EPSON TM-J7500 Printer	—
	DeviceName	TM-J7500	—
	RecCurrentCartridge	PrinterColors.Primary	—
	RecSidewaysMaxChars ^{Note 1}	73 (Font A), 97 (Font B)	—
	SlpCurrentCartridge	PrinterColors.Primary	—
	SlpLineChars	80	1 to 106 Numbers described in SlpLineCharsList can be set. For any other value, the value is set to the nearest value that is smaller in SlpLineCharsList.
	SlpLineCharsList	80, 106	—
	SlpLineWidth	960	—
	SlpSidewaysMaxChars ^{Note 2}	36 (Font A), 48 (Font B)	—
	SlpSidewaysMaxLines	32	—
TM-J7600	CapRec2Color	true	—
	CapRecColor	PrinterColors.Primary, PrinterColors.Custom1	—
	CapSlpBothSidesPrint	false	—
	CapSlpColor	PrinterColors.Primary, PrinterColors.Custom1	—
	FontTypefaceList	"OCR-B"	—
	DeviceDescription	EPSON TM-J7600 Printer	—
	DeviceName	TM-J7600	—
	RecCurrentCartridge	PrinterColors.Primary	PrinterColors.Primary, PrinterColors.Custom1
	RecSidewaysMaxChars ^{Note 1}	36 (Font A), 48 (Font B)	—
	SlpCurrentCartridge	PrinterColors.Primary	PrinterColors.Primary, PrinterColors.Custom1
	SlpLineChars	80	1 to 106 Numbers described in SlpLineCharsList can be set. For any other value, the value is set to the nearest value that is smaller in SlpLineCharsList.
	SlpLineCharsList	80, 106	—
	SlpLineWidth	960	—
	SlpSidewaysMaxChars ^{Note 2}	18 (Font A), 24 (Font B)	—
	SlpSidewaysMaxLines	32	—

Note 1: This is default value.

(7000/7500) This value changes according to the RecLineChars property setting, the paper width setting, and the CPI increase setting.

(7100/7600) This value changes according to the RecLineChars property setting, the paper width setting, the CPI increase setting, and the extend rotate print area setting.

Note 2: This is default value.

(7000/7500) This value changes according to the SlpLineChars property setting, the paper width setting, and the CPI increase setting.

(7100/7600) This value changes according to the SlpLineChars property setting, the paper width setting, the CPI increase setting, and the extend rotate print area setting.

● **Settings Affecting Changing of Paper Width**

Paper Width	Property	Setting Value/Default Value	Range of Settings
58 mm	RecLineChars	30	1 to 40 Numbers described in RecLineCharsList can be set. For any other value, if the set value is smaller than the maximum value supported by the printer, the value is set to the nearest value that is larger than the specified value in RecLineCharsList properties.
	RecLineCharsList	30, 40	—
	RecLineWidth	360	—
	RecSidewaysMaxLines	$12 = ((\text{Value of RecLineWidth} - 21 \text{ dots}) \div (\text{the largest value of RecLineSpacing and RecLineHeight})) + 1.$	—
70 mm	RecLineChars	36	1 to 48 Numbers described in RecLineCharsList can be set. For any other value, if the set value is smaller than the maximum value supported by the printer, the value is set to the nearest value that is larger than the specified value in RecLineCharsList properties.
	RecLineCharsList	36, 48	—
	RecLineWidth	432	—
	RecSidewaysMaxLines	The value resulting from the following calculation is set (after rounding it down to the nearest whole number). $14 = ((\text{Value of RecLineWidth} - 21 \text{ dots}) \div (\text{the largest value of RecLineSpacing and RecLineHeight})) + 1.$	—
76 mm	RecLineChars	40	1 to 53 Numbers described in RecLineCharsList can be set. For any other value, if the set value is smaller than the maximum value supported by the printer, the value is set to the nearest value that is larger than the specified value in RecLineCharsList properties.
	RecLineCharsList	40, 53	—
	RecLineWidth	480	—
	RecSidewaysMaxLines	16 = The value resulting from the following calculation is set (after rounding it down to the nearest whole number). $((\text{Value of RecLineWidth} - 21 \text{ dots}) \div (\text{the largest value of RecLineSpacing and RecLineHeight})) + 1.$	—
82 mm	RecLineChars	42	1 to 56 Numbers described in RecLineCharsList can be set. For any other value, if the set value is smaller than the maximum value supported by the printer, the value is set to the nearest value that is larger than the specified value in RecLineCharsList properties.
	RecLineCharsList	42, 56	—
	RecLineWidth	512	—
	RecSidewaysMaxLines	17 = The value resulting from the following calculation is set (after rounding it down to the nearest whole number). $((\text{Value of RecLineWidth} - 21 \text{ dots}) \div (\text{the largest value of RecLineSpacing and RecLineHeight})) + 1.$	—

● Settings Related to PageMode

TM-J7000

Station	Property	Setting Value/Default Value	Range of Settings
Receipt	PageModeArea	(Paper width: 58.0mm) "360,1176" (Paper width: 70.0mm) "432,984" (Paper width: 76.0mm) "480,880" (Paper width: 82.0mm) "512,832"	—
	PageModeDescriptor	PageModeDescriptors.Barcode, PageModeDescriptors.Bitmap, PageModeDescriptors.BitmapRotate, PageModeDescriptors.BarcodeRotate	—
	PageModeHorizontalPosition	0	0 or more
	PageModePrintArea	"0,0,0,0"	"X, Y, Width, Height" (Paper width: 58.0mm) X + Width ≤ 360 Y + Height ≤ 1176 (Paper width: 70.0mm) X + Width ≤ 432 Y + Height ≤ 984 (Paper width: 76.0mm) X + Width ≤ 480 Y + Height ≤ 880 (Paper width: 82.0mm) X + Width ≤ 512 Y + Height ≤ 832
	PageModePrintDirection	PageModePrintDirection.None	PageModePrintDirection.Bot tomToTop, PageModePrintDirection.Lef tToRight, PageModePrintDirection.Rig htToLeft, PageModePrintDirection.To pToBottom
	PageModeVerticalPosition	0	0 or more
Slip	PageModeArea	"576,736"	—
	PageModeDescriptor	PageModeDescriptors.Barcode, PageModeDescriptors.Bitmap, PageModeDescriptors.BitmapRotate, PageModeDescriptors.BarcodeRotate (The rotated 90-degree of barcode is not supported.)	—
	PageModeHorizontalPosition	0	0 or more
	PageModePrintArea	"0,0,0,0"	"X, Y, Width, Height" X + Width ≤ 576 Y + Height ≤ 736
	PageModePrintDirection	PageModePrintDirection.None	PageModePrintDirection.Bot tomToTop, PageModePrintDirection.Lef tToRight, PageModePrintDirection.Rig htToLeft, PageModePrintDirection.To pToBottom
	PageModeVerticalPosition	0	0 or more

TM-J7100

Station	Property	Setting Value/Default Value	Range of Settings
Receipt	PageModeArea ^{NOTE 1}	(Paper width: 58.0mm) "360,584" (Paper width: 70.0mm) "432,488" (Paper width: 76.0mm) "480,440" (Paper width: 82.0mm) "512,416"	—
	PageModeDescriptor	PageModeDescriptors.Barcode, PageModeDescriptors.Bitmap, PageModeDescriptors.BitmapRotate, PageModeDescriptors.BarcodeRotate	—
	PageModeHorizontalPosition	0	0 or more
	PageModePrintArea	"0,0,0,0"	"X, Y, Width, Height" (Paper width: 58.0mm) X + Width ≤ 360 Y + Height ≤ 584 (Paper width: 70.0mm) X + Width ≤ 432 Y + Height ≤ 488 (Paper width: 76.0mm) X + Width ≤ 480 Y + Height ≤ 440 (Paper width: 82.0mm) X + Width ≤ 512 Y + Height ≤ 416
	PageModePrintDirection	PageModePrintDirection.None	PageModePrintDirection.BottomToTop, PageModePrintDirection.LeftToRight, PageModePrintDirection.RightToLeft, PageModePrintDirection.TopToBottom
	PageModeVerticalPosition	0	0 or more
Slip	PageModeArea ^{NOTE 1}	"576,368"	—
	PageModeDescriptor	PageModeDescriptors.Barcode, PageModeDescriptors.Bitmap, PageModeDescriptors.BitmapRotate, PageModeDescriptors.BarcodeRotate (The rotated 90-degree of barcode is not supported.)	—
	PageModeHorizontalPosition	0	0 or more
	PageModePrintArea	"0,0,0,0"	"X, Y, Width, Height" X + Width ≤ 576 Y + Height ≤ 368
	PageModePrintDirection	PageModePrintDirection.None	PageModePrintDirection.BottomToTop, PageModePrintDirection.LeftToRight, PageModePrintDirection.RightToLeft, PageModePrintDirection.TopToBottom
	PageModeVerticalPosition	0	0 or more

^{NOTE 1} This is the default value.

This value changes depending on the extend rotate print area

TM-J7500

Station	Property	Setting Value/Default Value	Range of Settings
Receipt	PageModeArea	(Paper width: 58.0mm) "360,1176" (Paper width: 70.0mm) "432,984" (Paper width: 76.0mm) "480,880" (Paper width: 82.0mm) "512,832"	—
	PageModeDescriptor	PageModeDescriptors.Barcode, PageModeDescriptors.Bitmap, PageModeDescriptors.BitmapRotate, PageModeDescriptors.BarcodeRotate	—
	PageModeHorizontalPosition	0	0 or more
	PageModePrintArea	"0,0,0,0"	"X, Y, Width, Height" (Paper width: 58.0mm) $X + \text{Width} \leq 360$ $Y + \text{Height} \leq 1176$ (Paper width: 70.0mm) $X + \text{Width} \leq 432$ $Y + \text{Height} \leq 984$ (Paper width: 76.0mm) $X + \text{Width} \leq 480$ $Y + \text{Height} \leq 880$ (Paper width: 82.0mm) $X + \text{Width} \leq 512$ $Y + \text{Height} \leq 832$
	PageModePrintDirection	PageModePrintDirection.None	PageModePrintDirection.Bot tomToTop, PageModePrintDirection.Lef tToRight, PageModePrintDirection.Rig htToLeft, PageModePrintDirection.To pToBottom
	PageModeVerticalPosition	0	0 or more
Slip	PageModeArea	"960,440"	—
	PageModeDescriptor	PageModeDescriptors.Barcode, PageModeDescriptors.Bitmap, PageModeDescriptors.BitmapRotate, PageModeDescriptors.BarcodeRotate (The rotated 90-degree of barcode is not supported.)	—
	PageModeHorizontalPosition	0	0 or more
	PageModePrintArea	"0,0,0,0"	"X, Y, Width, Height" $X + \text{Width} \leq 960$ $Y + \text{Height} \leq 440$
	PageModePrintDirection	PageModePrintDirection.None	PageModePrintDirection.Bot tomToTop, PageModePrintDirection.Lef tToRight, PageModePrintDirection.Rig htToLeft, PageModePrintDirection.To pToBottom
	PageModeVerticalPosition	0	0 or more

TM-J7600

Station	Property	Setting Value/Default Value	Range of Settings
Receipt	PageModeArea ^{NOTE 1}	(Paper width: 58.0mm) "360,584" (Paper width: 70.0mm) "432,488" (Paper width: 76.0mm) "480,440" (Paper width: 82.0mm) "512,416"	—
	PageModeDescriptor	PageModeDescriptors.Barcode, PageModeDescriptors.Bitmap, PageModeDescriptors.BitmapRotate, PageModeDescriptors.BarcodeRotate	—
	PageModeHorizontalPosition	0	0 or more
	PageModePrintArea	"0,0,0,0"	"X, Y, Width, Height" (Paper width: 58.0mm) X + Width ≤ 360 Y + Height ≤ 584 (Paper width: 70.0mm) X + Width ≤ 432 Y + Height ≤ 488 (Paper width: 76.0mm) X + Width ≤ 480 Y + Height ≤ 440 (Paper width: 82.0mm) X + Width ≤ 512 Y + Height ≤ 416
	PageModePrintDirection	PageModePrintDirection.None	PageModePrintDirection.Bot tomToTop, PageModePrintDirection.Lef tToRight, PageModePrintDirection.Rig htToLeft, PageModePrintDirection.To pToBottom
	PageModeVerticalPosition	0	0 or more
Slip	PageModeArea ^{NOTE 1}	"960,216"	—
	PageModeDescriptor	PageModeDescriptors.Barcode, PageModeDescriptors.Bitmap, PageModeDescriptors.BitmapRotate, PageModeDescriptors.BarcodeRotate (The rotated 90-degree of barcode is not supported.)	—
	PageModeHorizontalPosition	0	0 or more
	PageModePrintArea	"0,0,0,0"	"X, Y, Width, Height" X + Width ≤ 960 Y + Height ≤ 216
	PageModePrintDirection	PageModePrintDirection.None	PageModePrintDirection.Bot tomToTop, PageModePrintDirection.Lef tToRight, PageModePrintDirection.Rig htToLeft, PageModePrintDirection.To pToBottom
	PageModeVerticalPosition	0	0 or more

NOTE 1 This is the default value.

This value changes depending on the extend rotate print area

Appendix-E Escape Sequences

The following figure is about supported/unsupported Escape Sequences.

Device	Escape Sequence	Range of Settings	
		Receipt	Slip
TM-J7000	ESC #P	0 to 100 (100)	—
	ESC #fP	0 to 100 (100)	—
	ESC #sP	—	—
	ESC sL	—	—
	ESC #B	1 to 20	1 to 20
	ESC tL	O	O
	ESC bL	O	O
	ESC #f	0 to 9999 (1)	0 to 9999 (1)
	ESC #uF	0 to 9999 (1)	0 to 9999 (1)
	ESC #rF	—	0 to 255 (1)
	ESC #E	0 to 999 (1)	0 to 999 (1)
	ESC #fT	—	—
	ESC bC	O	O
	ESC #uC	0 to 2 (1)	0 to 2 (1)
	ESC iC	—	—
	ESC #rC	1	1
	ESC rvC	O	O
	ESC #sC	—	—
	ESC 1C	O	O
	ESC 2C	O	O
	ESC 3C	O	O
	ESC 4C	O	O
	ESC #hC	1 to 8 (1)	1 to 8 (1)
	ESC #vC	1 to 8 (1)	1 to 8 (1)
	ESC tbC	—	—
	ESC tpC	—	—
	ESC cA	O	O
	ESC rA	O	O
	ESC lA	O	O
	ESC N	O	O
	ESC #R	1 to 999999999	1 to 999999999

The number in () is the value when # is omitted.
O indicates the setting is possible.

Device	Escape Sequence	Range of Settings	
		Receipt	Slip
TM-J7100	ESC #P	0 to 100 (100)	—
	ESC #fP	0 to 100 (100)	—
	ESC #sP	—	—
	ESC sL	—	—
	ESC #B	1 to 20	1 to 20
	ESC tL	O	O
	ESC bL	O	O
	ESC #fF	0 to 9999 (1)	0 to 9999 (1)
	ESC #uF	0 to 9999 (1)	0 to 9999 (1)
	ESC #rF	—	0 to 255 (1)
	ESC #E	0 to 999 (1)	0 to 999 (1)
	ESC #fT	—	—
	ESC bC	O	O
	ESC #uC	0 to 2 (1)	0 to 2 (1)
	ESC iC	—	—
	ESC #rC	1 to 2 (2)	1 to 2 (2)
	ESC rvC	O	O
	ESC #sC	—	—
	ESC 1C	O	O
	ESC 2C	O	O
	ESC 3C	O	O
	ESC 4C	O	O
	ESC #hC	1 to 8 (1)	1 to 8 (1)
	ESC #vC	1 to 8 (1)	1 to 8 (1)
	ESC tbC	—	—
	ESC tpC	—	—
	ESC cA	O	O
	ESC rA	O	O
	ESC lA	O	O
	ESC N	O	O
	ESC #R	1 to 999999999	1 to 999999999

The number in () is the value when # is omitted.
O indicates the setting is possible.

Device	Escape Sequence	Range of Settings	
		Receipt	Slip
TM-J7500	ESC #P	0 to 100 (100)	—
	ESC #fP	0 to 100 (100)	—
	ESC #sP	—	—
	ESC sL	—	—
	ESC #B	1 to 20	1 to 20
	ESC tL	O	O
	ESC bL	O	O
	ESC #IF	0 to 9999 (1)	0 to 9999 (1)
	ESC #uF	0 to 9999 (1)	0 to 9999 (1)
	ESC #rF	—	0 to 255 (1)
	ESC #E	0 to 999 (1)	0 to 999 (1)
	ESC #fT	0 to 1	0 to 1
	ESC bC	O	O
	ESC #uC	0 to 2 (1)	0 to 2 (1)
	ESC iC	—	—
	ESC #rC	1	1
	ESC rvC	O	O
	ESC #sC	—	—
	ESC 1C	O	O
	ESC 2C	O	O
	ESC 3C	O	O
	ESC 4C	O	O
	ESC #hC	1 to 8 (1)	1 to 8 (1)
	ESC #vC	1 to 8 (1)	1 to 8 (1)
	ESC tbC	—	—
	ESC tpC	—	—
	ESC cA	O	O
	ESC rA	O	O
	ESC lA	O	O
	ESC N	O	O
	ESC #R	1 to 999999999	1 to 999999999

The number in () is the value when # is omitted.
O indicates the setting is possible.

Device	Escape Sequence	Range of Settings	
		Receipt	Slip
TM-J7600	ESC #P	0 to 100 (100)	—
	ESC #fP	0 to 100 (100)	—
	ESC #sP	—	—
	ESC sL	—	—
	ESC #B	1 to 20	1 to 20
	ESC tL	O	O
	ESC bL	O	O
	ESC #fF	0 to 9999 (1)	0 to 9999 (1)
	ESC #uF	0 to 9999 (1)	0 to 9999 (1)
	ESC #rF	—	0 to 255 (1)
	ESC #E	0 to 999 (1)	0 to 999 (1)
	ESC #fT	0 to 1	0 to 1
	ESC bC	O	O
	ESC #uC	0 to 2 (1)	0 to 2 (1)
	ESC iC	—	—
	ESC #rC	1 to 2 (2)	1 to 2 (2)
	ESC rvC	O	O
	ESC #sC	—	—
	ESC 1C	O	O
	ESC 2C	O	O
	ESC 3C	O	O
	ESC 4C	O	O
	ESC #hC	1 to 8 (1)	1 to 8 (1)
	ESC #vC	1 to 8 (1)	1 to 8 (1)
	ESC tbC	—	—
	ESC tpC	—	—
	ESC cA	O	O
	ESC rA	O	O
	ESC lA	O	O
	ESC N	O	O
	ESC #R	1 to 999999999	1 to 999999999

The number in () is the value when # is omitted.
O indicates the setting is possible.

Appendix-F DeviceStatistics

TM-J7000/7100

XML Definition Name	Description	Reset Permission	Update Permission
UnifiedPOSVersion	UPOS version	x	x
DeviceCategory	Device category	x	x
ManufactureName	Manufacturer name	x	x
ModelName	Device name	x	x
SerialNumber	Serial number	x	x
ManufactureDate	Manufacture date	x	x
MechanicalRevision	Device revision	x	x
FirmwareRevision	Firmware version	x	x
Interface	Interface	x	x
InstallationDate	Installation date	x	x
HoursPoweredCount	Operation time	O	x
CommunicationErrorCount	Communication error count	O	O
BarcodePrintedCount	Barcode print count	O	O
FormInsertionCount	Slip insertion count	O	O
HomeErrorCount	Mechanical error count	O	O
JournalCharacterPrintedCount	Journal character print count	x	x
JournalLinePrintedCount	Journal line print count	x	x
MaximumTempReachedCount	Head temperature error count	O	O
NVRAMWriteCount	NVRAM setting count	O	O
PaperCutCount	Paper cut count	O	x
FailedPaperCutCount	Paper cut failure count	O	O
PrinterFaultCount	Unrecoverable error count	O	O
PrintSideChangeCount	Slip side change count	O	O
FailedPrintSideChangeCount	Slip side change failure count	O	O
ReceiptCharacterPrintedCount	Receipt print character count	O	O
ReceiptLinePrintedCount	Receipt print line count	O	O
ReceiptLineFeedCount	Receipt line feed count	O	x
ReceiptCoverOpenCount	Receipt cover open count	O	O
SlipCharacterPrintedCount	Slip print character count	O	O
SlipLinePrintedCount	Slip print line count	O	O
SlipLineFeedCount	Slip line feed count	O	x
SlipCoverOpenCount	Slip cover open count	O	O
StampFiredCount	Stamp print count	x	x

O: Permitted
x: Not permitted

TM-J7500/7600

XML Definition Name	Description	Reset Permission	Update Permission
UnifiedPOSVersion	UPOS version	x	x
DeviceCategory	Device category	x	x
ManufacturerName	Manufacturer name	x	x
ModelName	Device name	x	x
SerialNumber	Serial number	x	x
ManufactureDate	Manufacture date	x	x
MechanicalRevision	Device revision	x	x
FirmwareRevision	Firmware version	x	x
Interface	Interface	x	x
InstallationDate	Installation date	x	x
HoursPoweredCount	Operation time	O	x
CommunicationErrorCount	Communication error count	O	O
BarcodePrintedCount	Barcode print count	O	O
FormInsertionCount	Slip insertion count	O	O
HomeErrorCount	Mechanical error count	O	O
JournalCharacterPrintedCount	Journal character print count	x	x
JournalLinePrintedCount	Journal line print count	x	x
MaximumTempReachedCount	Head temperature error count	O	O
NVRAMWriteCount	NVRAM setting count	O	O
PaperCutCount	Paper cut count	O	x
FailedPaperCutCount	Paper cut failure count	O	O
PrinterFaultCount	Unrecoverable error count	O	O
PrintSideChangeCount	Slip side change count	x	x
FailedPrintSideChangeCount	Slip side change failure count	x	x
ReceiptCharacterPrintedCount	Receipt print character count	O	O
ReceiptLinePrintedCount	Receipt print line count	O	O
ReceiptLineFeedCount	Receipt line feed count	O	x
ReceiptCoverOpenCount	Receipt cover open count	O	O
SlipCharacterPrintedCount	Slip print character count	O	O
SlipLinePrintedCount	Slip print line count	O	O
SlipLineFeedCount	Slip line feed count	O	x
SlipCoverOpenCount	Slip cover open count	O	O
StampFiredCount	Stamp print count	x	x

O: Permitted
x: Not permitted